

QT-Ez Series


Horizontal Turning Series




Designed and built in Kentucky, the QT-Ez Series gives shops affordable access to Mazak reliability, accuracy and performance. QT-Ez machines can also be configured with a range of tailstock, automation, chip management and Multi-Tasking options that expand their functionality – and even provide full access to DONE IN ONE® capabilities for single-setup machining.

FEATURES

- Powerful and reliable integral motor headstock designs.
- Hybrid MX Roller Guide System improves rigidity, accuracy and reliability.
- Pre-tensioned ball screw systems with support at each end.
- Turret configurations include a 2-axis drum style, Mazak bolt-on or BMT 55 for rotary tool applications.
- Tailstock options include a manual position with hydraulic quill or servo positioning capability.
- Rotary tooling (M) and Y-axis off-centerline machining (Y) for Multi-Tasking processing.
- High-production second spindle (S) available for DONE IN ONE® part processing.
- Seamless integration for bar feeders and robots for unmanned operations.

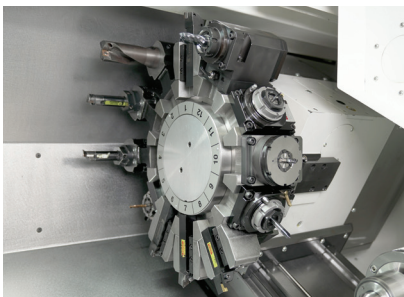

Bolt-on Milling Turret

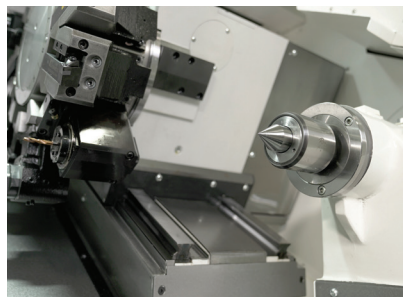

Servo Tailstock Option



MAZATROL SmoothEz CNC

- 15" capacitive touch-screen display with full keyboard.
- EIA/G-code and MAZATROL programming languages standard.
- 800MHz x 2 NC with 512MB of DDR3-SDRAM.
- SMOOTH Machining Configuration (SMC) capabilities.
- Newly designed LAUNCHER screen.
- Enhanced MAZATROL features, MAZATROL TWINS capability, plus the addition of QUICK MAZATROL.

Product images are for illustration purposes only and may not be exact representations of the products. Mazak reserves the right to change product images and specifications at any time without notice.

Mazak

QT-Ez Series Specifications

SPECIFICATION		QT-Ez 8	QT-Ez 10	QT-Ez 12	
CAPACITY	Maximum Swing	27.40 in / 695 mm	27.40 in / 695 mm	27.40 in / 695 mm	
	2-Axis				
	Maximum Machining Diameter	16.13 in / 410 mm	16.13 in / 410 mm	16.13 in / 410 mm	
	M / MY / MSY				
	Maximum Machining Diameter	13.5 in / 340 mm	13.5 in / 340 mm	13.5 in / 340 mm	
	2-Axis				
	Standard Machining Diameter	8.35 in / 212 mm	8.35 in / 212 mm	10 in / 254 mm	
	M / MY / MSY				
	Standard Machining Diameter	9.25 in / 235 mm	9.25 in / 235 mm	10 in / 254 mm	
	Maximum Bar Work Capacity	2.0 in / 51 mm	2.5 in / 64 mm	3.0 in / 76 mm	
Max Support Weight (Chuck / Shaft Work)	440 lbs / 1,100 lbs (200 kg / 500 kg)	440 lbs / 1,100 lbs (200 kg / 500 kg) MSY chuck work = 990 lbs (450 kg)	990 lbs / 1,100 lbs (450 kg / 500 kg)		
2-Axis	Maximum Machining Length (500U)	23.40 in / 594 mm	22.83 in / 577 mm	21.44 in / 545 mm	
M / MY / MSY	Maximum Machining Length (500U)	20.78 in / 529 mm	M and MY = 20.21 in / 551 mm MSY = 21.85 in / 554 mm	18.94 in / 479 mm	
2-Axis	Maximum Machining Length (1,000U)	—	—	43.19 in / 1,095 mm	
M / MY / MSY	Maximum Machining Length (1,000U)	—	—	40.56 in / 1,029 mm	
MAIN SPINDLE	Maximum Spindle Speed	6,000 rpm	4,500 rpm	4,000 rpm	
	Standard Chuck Size	8 in / 203 mm	10 in / 254 mm	12 in / 305 mm	
	Maximum Speed of STD Chuck	5,000 rpm	4,200 rpm	3,300 rpm	
	Motor Output	20.0 hp / 15 kw (25% ED)	20.0 hp / 15 kw (25% ED)	30.0 hp / 22 kw (10% ED)	
	Spindle Torque (Max)	123 ft-lbs (167 Nm)	144 ft-lbs (195 Nm)	285 ft-lbs (387 Nm)	
	Spindle Nose	A2-6	A2-6	A2-8	
	TURRET	Number of Tools	12	12	12
Turning Tooling Size		1.0 in O.D. / 1.5 in I.D. / 1.0 in 2nd O.D.	1.0 in O.D. / 1.5 in I.D. / 1.0 in 2nd O.D.	1.0 in O.D. / 1.5 in I.D. / 1.0 in 2nd O.D.	
M / MY / MSY					
Maximum Milling Speed		6,000 rpm	6,000 rpm	6,000 rpm	
M / MY / MSY					
Motor Output (25% ED)	7.5 hp (5.5 kw)	7.5 hp (5.5 kw)	10.0 hp (7.5 kw)		
FEED AXES	Travel (X Axis)	8.50 in / 215 mm	8.50 in / 215 mm	8.50 in / 215 mm	
	2-Axis				
	Travel (Z Axis) (500U)		24.50 in / 625 mm	24.50 in / 625 mm	24.50 in / 625 mm
		M	23.75 in / 605 mm	23.75 in / 605 mm	23.75 in / 605 mm
		MY	23.75 in / 605 mm	23.75 in / 605 mm	23.75 in / 605 mm
		MSY	23.75 in / 605 mm	23.75 in / 605 mm	23.75 in / 605 mm
	MY / MSY	Travel (Y Axis)	4.0 in / 100 mm	4.0 in / 100 mm	4.0 in / 100 mm
MSY	Travel (W Axis)	23.75 in / 605 mm	23.00 in / 585 mm	23.75 in / 605 mm	
Rapid Rates	500U	X Axis / Y Axis / Z Axis	1,181 ipm / 394 ipm / 1,417 ipm	1,181 ipm / 394 ipm / 1,417 ipm	
	1,000U	X Axis / Y Axis / Z Axis	1,181 ipm / 394 ipm / 1,181 ipm	1,181 ipm / 394 ipm / 1,181 ipm	
Second Spindle	Chuck Size	5 in / 127 mm	6 in / 152 mm	6 in / 152 mm	
	MSY	Maximum Speed	6,000 rpm	6,000 rpm	
	MSY	Motor Output (3-Minute Rating)	10 hp / 7.5 kw	10 hp / 7.5 kw	
	MSY	Spindle Torque (Max.)	38.3 ft-lbs (52 Nm)	38.3 ft-lbs (52 Nm)	
Machine Depth		75 in / 1,905 mm	75 in / 1,905 mm	75 in / 1,905 mm	
Machine Length (500U / 1,000U)		102.4 in / 2,600 mm	109.1 in / 2,771 mm	109.1 in / 2,771 mm	
Machine Height		67.9 in / 1,725 mm	67.9 in / 1,725 mm	67.9 in / 1,725 mm	
Machine Weight (500U) 2-Axis		11,244 lbs / 5,111 kg	11,310 lbs / 5,130 kg	11,685 lbs / 5,300 kg	
	M / MY	11,905 lbs / 5,400 kg	11,949 lbs / 5,420 kg	12,324 lbs / 5,590 kg	
	MSY	12,125 lbs / 5,500 kg	12,260 lbs / 5,561 kg	12,640 lbs / 5,733 kg	